


DO-35 Small Signal Switching Diodes

FEATURES

- Fast Switching Speed
- Electrically Identical to Standard JEDEC
- High reliability
- Lead free in compliance with EU RoHS 2.0
- Component in accordance to RoHS 2015/863 and WEEE 2012/19/EU

MECHANICAL DATA

- Case style: DO-35, glass case
- Mounting position: Any

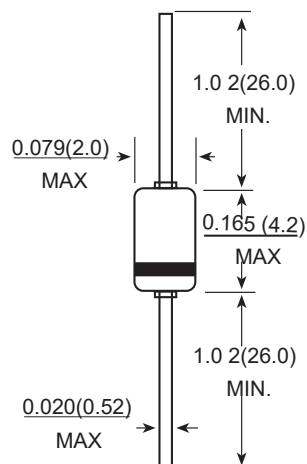

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND CHARACTERISTICS


@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	Symbol	1SS131	UNITS
Maximum DC reverse voltage	V_R	80	V
Maximum recurrent reverse voltage	V_{RM}	90	V
Power dissipation	P_{tot}	300	mW
Maximum average forward rectified current	$I_{F(AV)}$	130	mA
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I_{FSM}	400	mA
Maximum instantaneous forward voltage @ 100mA	V_F	1.2	V
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=150^\circ\text{C}$	I_R	0.5 50	μA
Reverse recovery time @ $I_F=10\text{mA}, V_R=6\text{V}, R_L=50\Omega$	t_{rr}	4.0	ns
Operating junction temperature range	T_J	- 55 ---- + 175	$^\circ\text{C}$
Storage temperature range	T_{STG}	- 55 ---- + 175	$^\circ\text{C}$

RATINGS AND CHARACTERISTIC CURVES


INSTANTANEOUS FORWARD CURRENT, AMPERES

FIG.1 - FORWARD CHARACTERISTICS

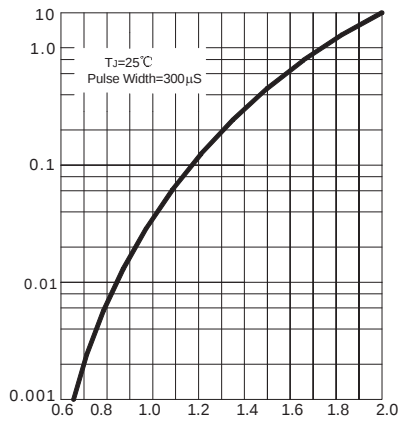

INSTANTANEOUS FORWARD VOLTAGE, VOLTS


FIG.2 -- SURGE CURRENT CHARACTERISTICS

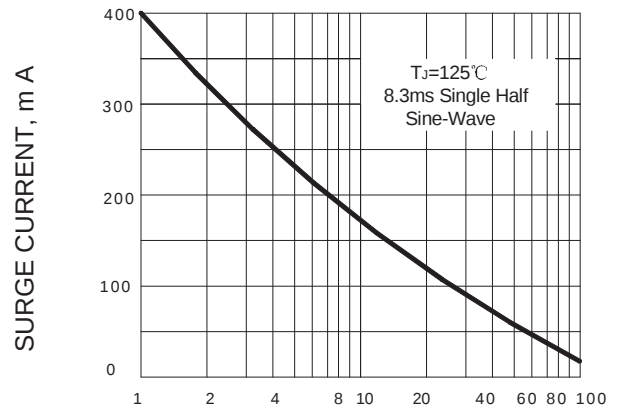

FORWARD VOLTAGE, V

FIG.3 -- REVERSE CHARACTERISTICS


REVERSE CURRENT, nA

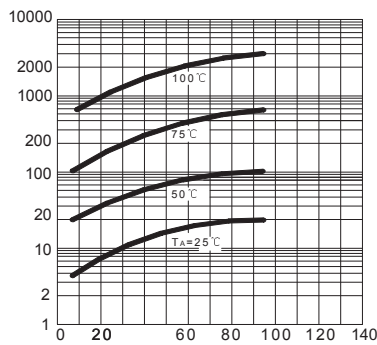

FORWARD VOLTAGE, V

FIG.4 -- REVERSE RECOVERY TIME CHARACTERISTICS

REVERSE RECOVERY TIME, ns

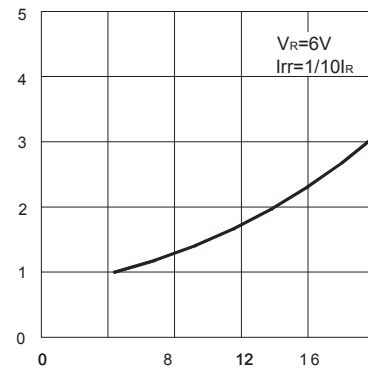

FORWARD CURRENT, mA

FIG.5 -- REVERSE RECOVERY TIME (t_{rr}) MEASUREMENT CIRCUIT

