


TO-252 Three-terminal positive voltage regulator

FEATURES

- Maximum output current IOM: 1.5 A
- Output voltage VO: 8V
- Continuous total dissipation PD: 1.5W

MECHANICAL DATA

- Case: TO-252 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any

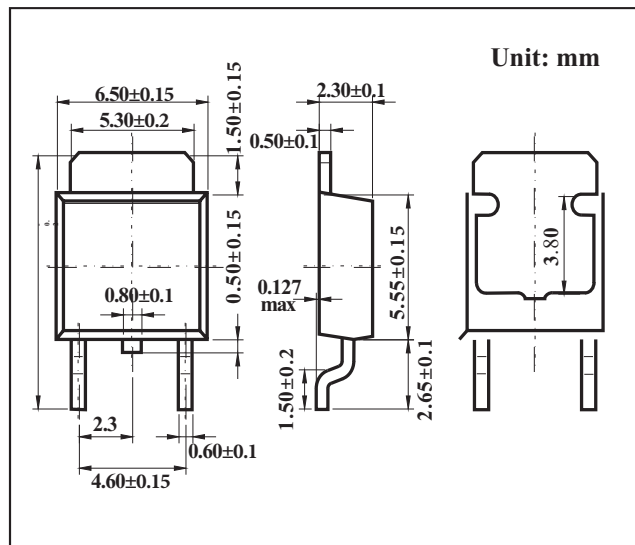

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)


Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	66.7	°C/W
Operating Junction Temperature Range	T_{OPR}	-25~+125	°C
Storage Temperature Range	T_{STG}	-65~+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE

($V_i=14V$, $I_o=500mA$, $C_i=0.33\mu F$, $C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Output Voltage	Vo		25℃	7.7	8	8.3	V
		10.5V≤Vi≤23V, Io=5mA-1A	-25-125℃	7.6	8	8.4	V
Load Regulation	ΔVo	Io=5mA-1.5A	25℃		12	160	mV
		Io=250mA-750mA	25℃		4	80	mV
Line Regulation	ΔVo	10.5V≤Vi≤25V	25℃		6	160	mV
		11V≤Vi≤17V	25℃		2	80	mV
Quiescent Current	Iq		25℃		4.3	8	mA
Quiescent Current Change	ΔIq	10.5V≤Vi≤25V	-25-125℃			1	mA
		5mA≤Io≤1A	-25-125℃			0.5	mA
Output Voltage Drift	ΔVo/ΔT	Io=5mA	-25-125℃		-0.8		mV/℃
Output Noise Voltage	VN	10Hz≤f≤100KHz	25℃		52		μV/Vo
Ripple Rejection	RR	11.5V≤Vi≤21.5V,f=120Hz	-25-125℃	55	72		dB
Dropout Voltage	Vd	Io=1A	25℃		2		V
Output Resistance	RO	f=1KHz	25℃		10		mΩ
Short Circuit Current	Isc		25℃		450		mA
Peak Current	Ipk		25℃		2.2		A

* Pulse test.

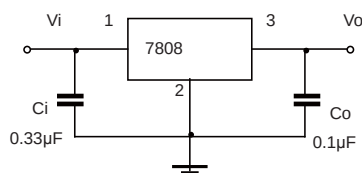

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

RATINGS AND CHARACTERISTIC CURVES

TYPICAL APPLICATION

