

TO-252 Three-terminal positive voltage regulator


FEATURES

- Maximum output current IOM: 0.5 A
- Output voltage V_O : 15V
- Continuous total dissipation

P_D : 1.25 W ($T_a = 25^\circ\text{C}$)

MECHANICAL DATA

- Case: TO-252 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any

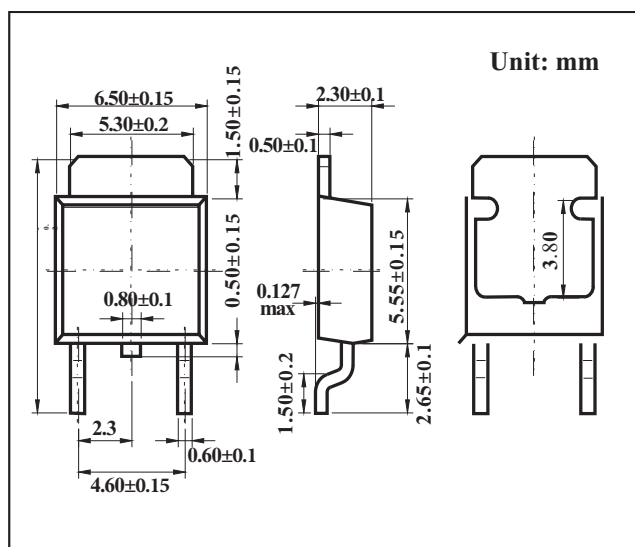

ABSOLUTE MAXIMUM RATINGS

(Operating temperature range applies unless otherwise specified)


Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	80	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_{OPR}	-25~+125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65~+150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($V_i=23\text{V}$, $I_o=350\text{mA}$, $C_i=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Output Voltage	Vo	Vi=23V, Io=350mA	25°C	14.4	15	15.6	V
		17.5≤Vi≤30V, Io=5mA~350mA	-25-125°C	14.25	15	15.75	V
Load Regulation	ΔVo	Io=5mA~500mA	25°C			300	mV
		Io=5mA~200mA	25°C			150	mV
Line Regulation	ΔVo	17.5V≤Vi≤30V, Io=200mA	25°C			100	mV
		20V≤Vi≤26V, Io=200mA	25°C			50	mV
Quiescent Current	Iq	Vi=23V, Io=350mA	25°C			6	mA
Quiescent Current Change	ΔIq	17.5V≤Vi≤30V, Io=200mA	-25-125°C			0.8	mA
	ΔIq	Vi=23V, Io=5mA~350mA	-25-125°C			0.5	mA
Output Noise Voltage	VN	10Hz≤f≤100KHz	25°C		90		μV/Vo
Ripple Rejection	RR	18.5≤Vi≤28.5V, f=120Hz, Io=300mA	-25-125°C	54			dB
Dropout Voltage	Vd		25°C		2		V

* Pulse test.

TYPICAL APPLICATION



Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

RATINGS AND CHARACTERISTIC CURVES

Typical Characteristics

