


GBU SILICON BRIDGE RECTIFIER

FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- High reliability
- High temperature soldering guaranteed: 260 °C/10 seconds at terminals
- Component in accordance to RoHs 2015/863 and WEEE 2012/19/EU

MECHANICAL DATA

- Case style: GUB molded plastic
- Mounting position: Any

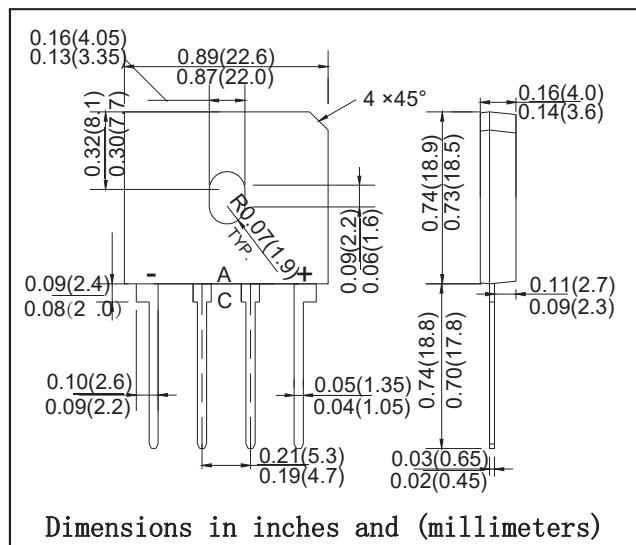

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

TYPE NUMBER	SYMBOL	GBU 15A	GBU 15B	GBU 15D	GBU 15G	GBU 15J	GBU 15K	GBU 15M	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum average forward T _c =100°C output current	I _{F(AV)}	15.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I _{FSM}	240.0							A
Maximum instantaneous forward voltage at 7.5 A	V _F	1.0							V
Maximum reverse current @T _A =25°C at rated DC blocking voltage @T _A =125°C	I _R	5.0 500.0							µA mA
Typical junction capacitance per leg	C _J	211				94			pF
Typical thermal resistance per leg	R _{θJA} R _{θJC}	21.0 2.2							°C/W
Operating junction temperature range	T _J	- 55 ---- + 150							°C
Storage temperature range	T _{STG}	- 55 ---- + 150							°C

RATINGS AND CHARACTERISTIC CURVES

FIG.1 – DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

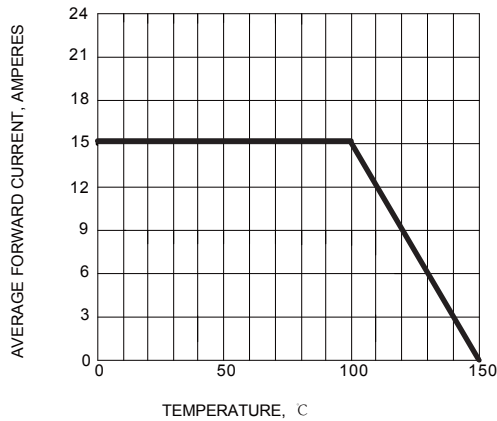


FIG.2 – TYPICAL FORWARD CHARACTERISTIC

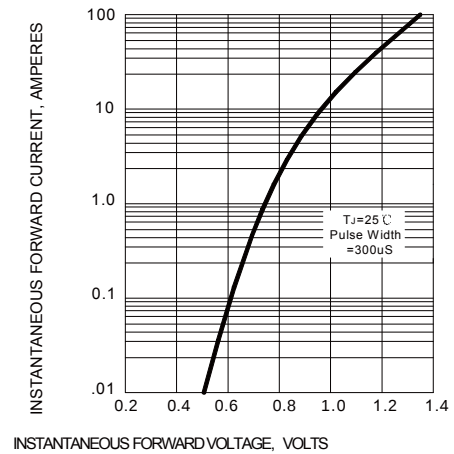


FIG.3 – MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

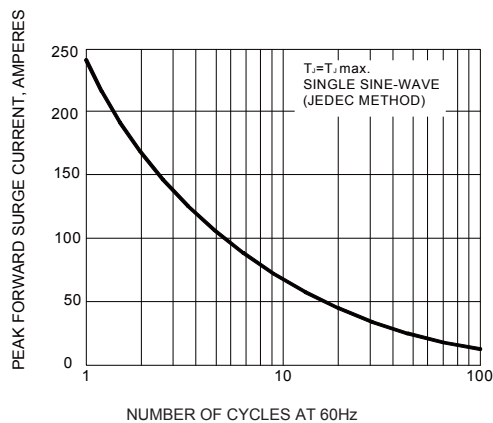


FIG.4 – TYPICAL REVERSE CHARACTERISTIC

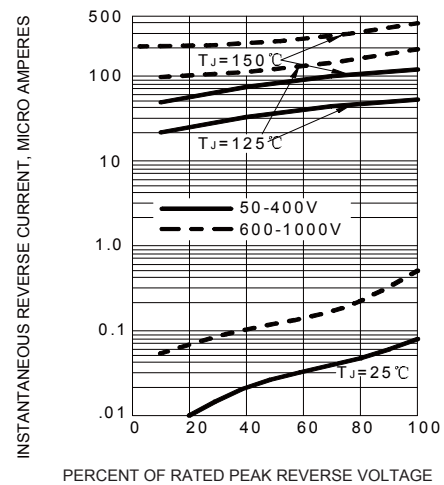


FIG.5 – TYPICAL JUNCTION CAPACITANCE PERLEG

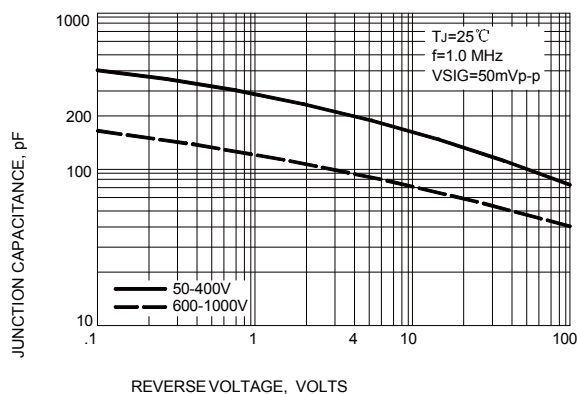


FIG.6 – TYPICAL TRANSIENT THERMAL IMPEDANCE

