

DO-15 PLASTIC SILICON RECTIFIERS


FEATURES

- The plastic package carries Underwrites Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- High reliability
- High temperature soldering guaranteed:260 °C/10 seconds at terminals
- Component in accordance to RoHs 2015/863 and WEEE

2012/19/EU

MECHANICAL DATA

- Case style: DO-15 molded plastic
- Mounting position: Any

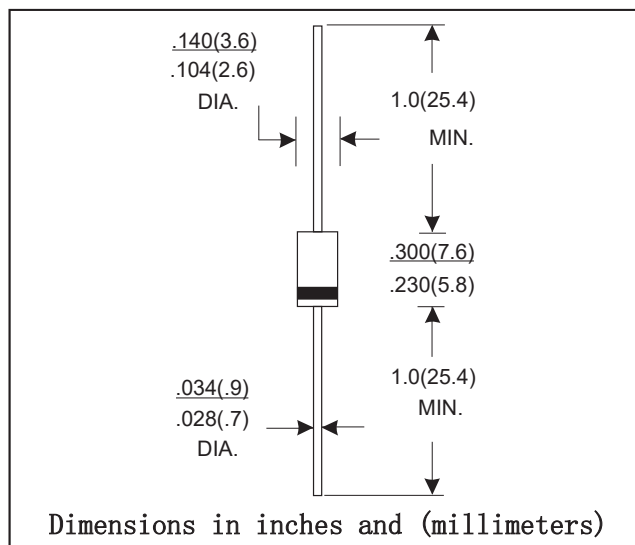

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	Symbols	RL151	RL152	RL153	RL154	RL155	RL156	RL157	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum average Forward Rectified Current 0.375"(9.5mm)lead length at TA=75°C	I_{AV}	1.5							Amps
Peak Forward Surge Current(8.3ms)half sine-wave cuperimposed on rated load (JEDEC method)	I_{FSM}	50.0							Amps
Maximum Instantaneous Forward Voltage at 1.5 A	V_F	1.1							Volts
Maximum Reverse current at rated DC Blocking Voltage	TA=25 C	5.0							A
	TA=100 C								
Typical Thermal Resistance(Note 2)	$R_{\theta JA}$	50.0							°C/W
Typical Junction Capacitance(Note 1)	C_J	20.0							PF
Operating and Storage Temperature Range	TJ	-55 to+175							°C
	TSTG								

RATINGS AND CHARACTERISTIC CURVES

FIG.1-FORWARD CURRENT DERATING CURVE

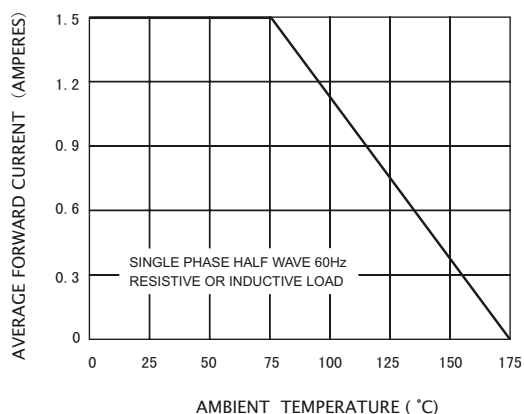


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

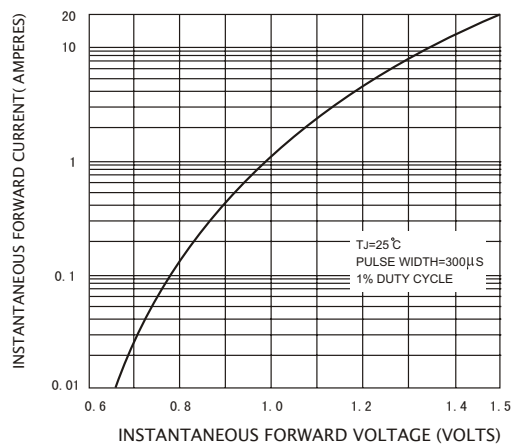


FIG.3-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

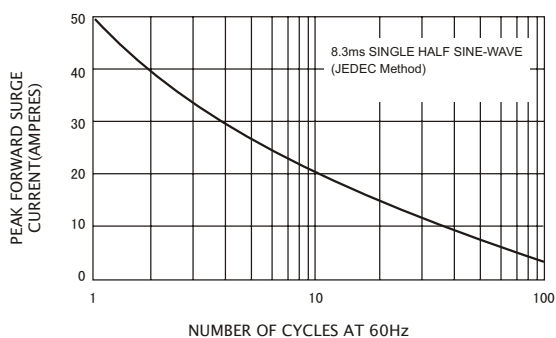


FIG.4-TYPICAL REVERSE CHARACTERISTICS

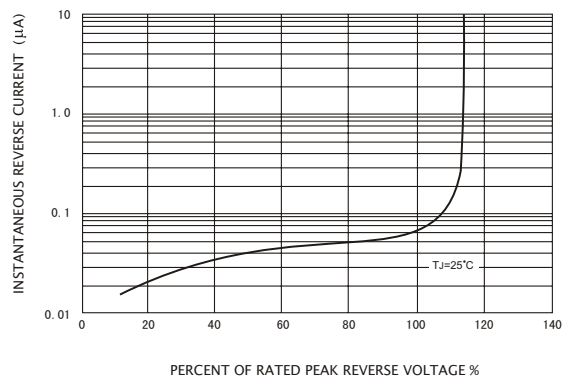


FIG.5-TYPICAL JUNCTION CAPACITANCE

