


DO-15 PLASTIC SILICON RECTIFIERS

FEATURES

- The plastic package carries Underwrites Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- High reliability
- High temperature soldering guaranteed:260 °C/10 seconds at terminals
- Component in accordance to RoHs 2015/863 and WEEE 2012/19/EU

MECHANICAL DATA

- Case style: DO-15 molded plastic
- Mounting position: Any

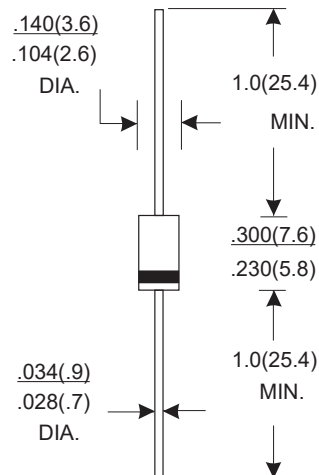

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter		Symbols	RL201	RL202	RL203	RL204	RL205	RL206	RL207	Units
Maximum Recurrent Peak Reverse Voltage		V _{RRM}	50	100	300	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	300	400	600	800	1000	Volts
Maximum average Forward Rectified Current 0.375"(9.5mm)lead length at TA=75°C		I _(AV)	2.0							Amps
Peak Forward Surge Current(8.3ms)half sine-wave cuperimposed on rated load (JEDEC method)		I _{FSM}	70.0							Amps
Maximum Instantaneous Forward Voltage at 2.0 A		V _F	1.1							Volts
Maximum Reverse current at rated DC Blocking Voltage	@T _A =25°C	I _R	5.0							μA
	@T _A =100°C		50.0							
Typical Thermal Resistance(Note 2)		R _{θJA}	40.0							°C/W
Typical Junction Capacitance(Note 1)		C _J	20.0							PF
Operating and Storage Temperature Range		T _J	-55 to+175							°C
		T _{STG}								

RATINGS AND CHARACTERISTIC CURVES

FIG.1 – FORWARD DERATING CURVE

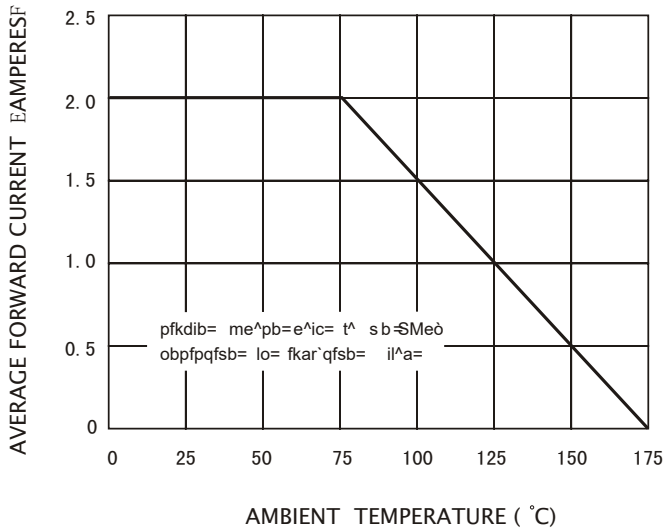


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

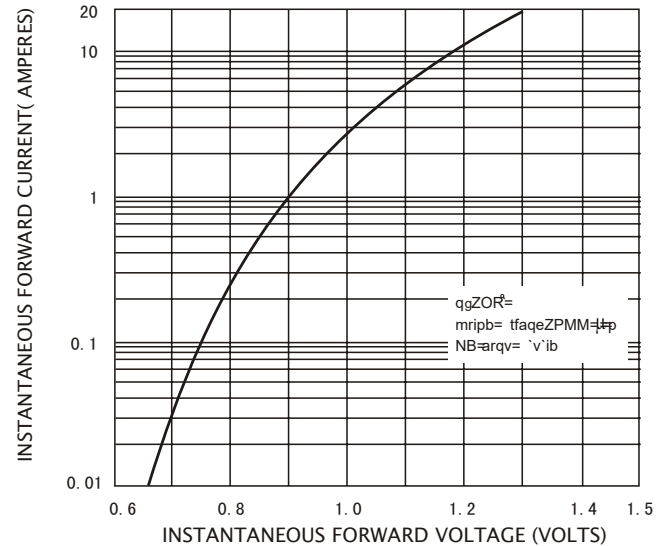


FIG.3 – MAXIMUM PEAK NON-REPETITIVE FORWARD SURGE CURRENT

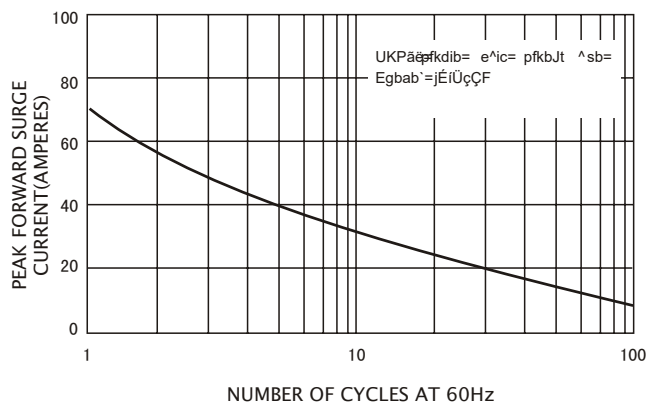


FIG.4-TYPICAL REVERSE CHARACTERISTICS

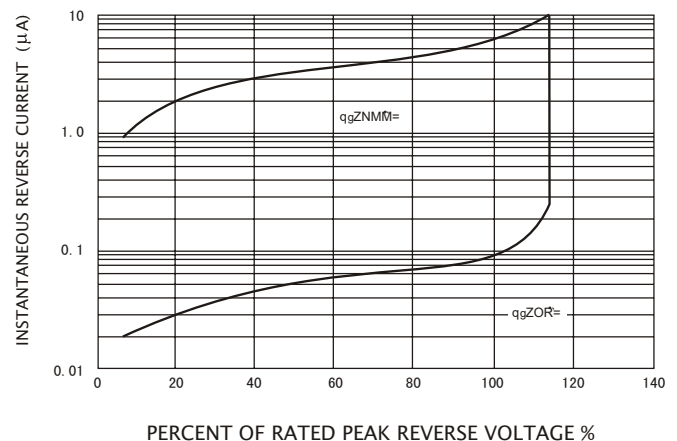


FIG.5-TYPICAL JUNCTION CAPACITANCE

