


SMA FAST RECOVERY RECTIFIERS

FEATURES

- The plastic package carries Underwrites Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- High reliability
- High temperature soldering guaranteed: 260 °C/10 seconds at terminals
- Component in accordance to RoHs 2015/863 and WEEE 2012/19/EU

MECHANICAL DATA

- Case style: SMA molded plastic
- Mounting position: Any

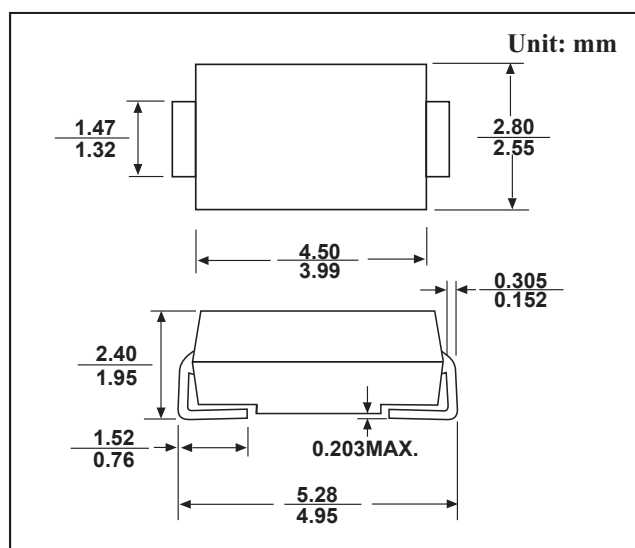

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

CHARACTERISTICS	SYMBOL	RS1A	RS1B	RS1D	RS1G	RS1J	RS1K	RS1M	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @TA=75℃	I(AV)	1.0							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	IFSM	30							A
Peak Forward Voltage at 1.0A DC	VF	1.3							V
Maximum DC Reverse Current @TJ=25℃ at Rated DC Blocking Voltage @TJ=100℃	IR	5.0 100							uA
Maximum Reverse Reovery Time	TRR	150				250	500		nS
Tyical Junction Capacitance	CJ	25				15			pF
Tyical Termal Resistance	RθJA	25							℃/W
Operating Temperature Range	TJ	-55 to +150							℃
Storage Temperature Range	TSTG	-55 to +150							℃

RATINGS AND CHARACTERISTIC CURVES

FIG. 1 – FORWARD CURRENT DERATING CURVE

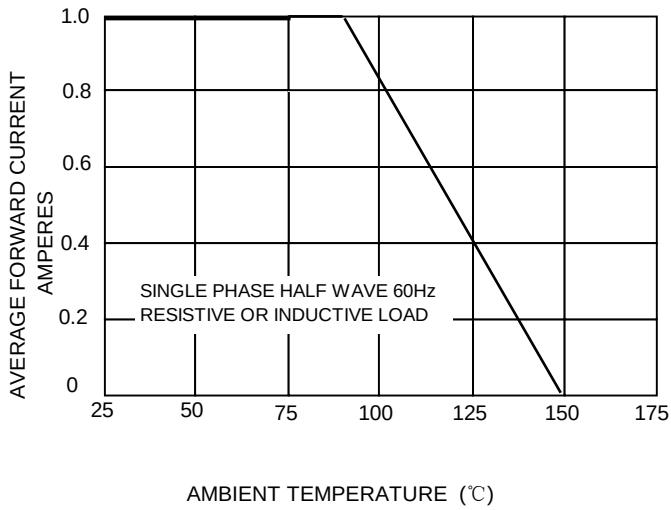


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

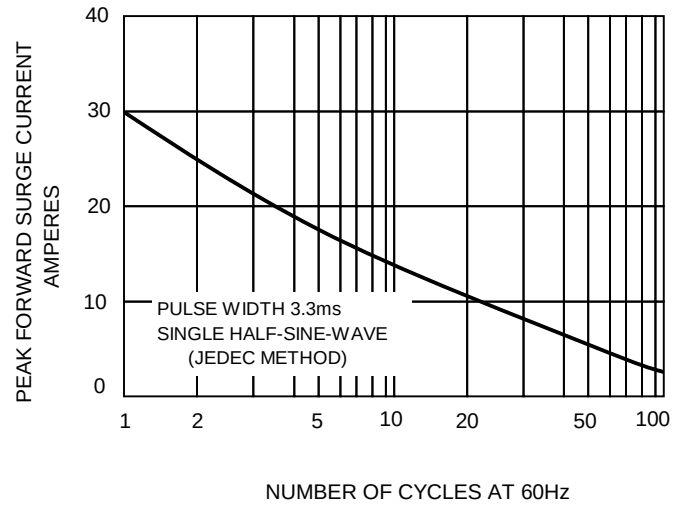


FIG.3 – TYPICAL JUNCTION CAPACITANCE

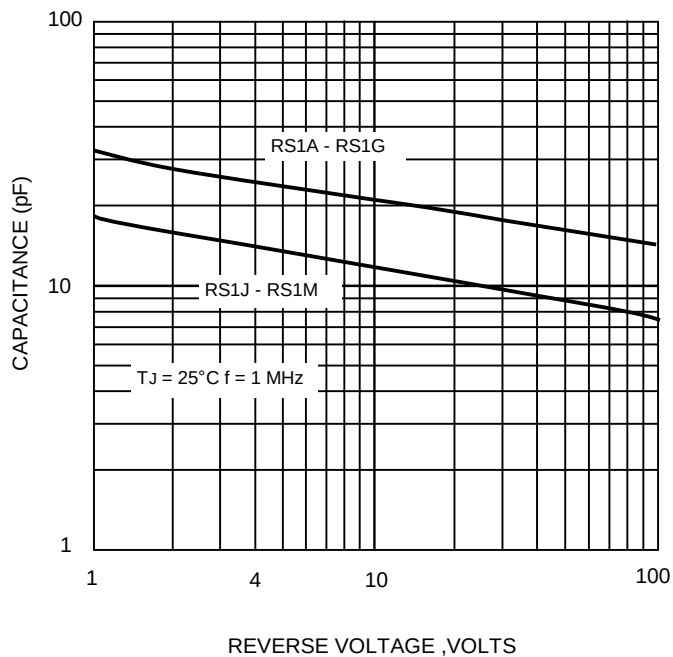


FIG.4-TYPICAL FORWARD CHARACTERISTICS

