

SOT-23 Plastic-Encapsulate Transistors

Features


- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process
- High packing density
- NPN Silicon Transistor

Descriptions

- Switching application
- Interface circuit and driver circuit application

MECHANICAL DATA

- Case: SOT-23 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any

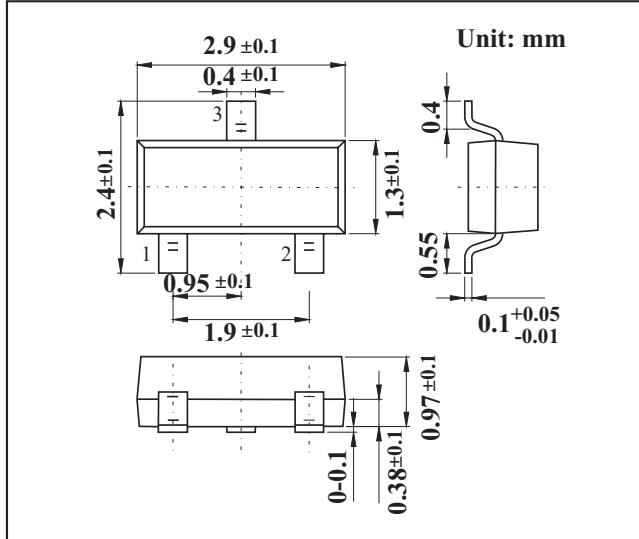

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

| Characteristic | Symbol | Rating | Unit |
|---------------------------|------------------|-----------|------|
| Output voltage | V _O | 50 | V |
| Input voltage | V _I | 30, -10 | V |
| Output current | I _O | 100 | mA |
| Power dissipation | P _D | 200 | mW |
| Junction temperature | T _J | 150 | °C |
| Storage temperature range | T _{stg} | -55 ~ 150 | °C |

Electrical Specification (T_A=25°C unless otherwise specified)

| Characteristic | Symbol | Test Condition | Min | Typ | Max | Unit |
|---------------------------------|---------------------|--|-----|-----|------|------|
| Output cut-off current | I _{O(OFF)} | V _O =50V, V _I =0 | - | - | 500 | nA |
| DC current gain | G _I | V _O =5V, I _O =10mA | 50 | 80 | - | - |
| Output voltage | V _{O(ON)} | I _O =10mA, I _I =0.5mA | - | 0.1 | 0.3 | V |
| Input voltage (ON) | V _{I(ON)} | V _O =0.2V, I _O =5mA | - | 1.8 | 2.4 | V |
| Input voltage (OFF) | V _{I(OFF)} | V _O =5V, I _O =0.1mA | 1.0 | 1.2 | - | V |
| Transition frequency | f _T * | V _O =10V, I _O =5mA, f=1MHz | - | 200 | - | MHz |
| Input current | I _I | V _I =5V, I _O =0 | - | - | 0.88 | mA |
| Input resistor (Input to base) | R ₁ | - | 7 | 10 | 13 | KΩ |
| Input resistor (Base to common) | R ₂ | - | 7 | 10 | 13 | KΩ |

* : Characteristic of transistor only

RATINGS AND CHARACTERISTIC CURVES

Fig. 1 P_D - T_a

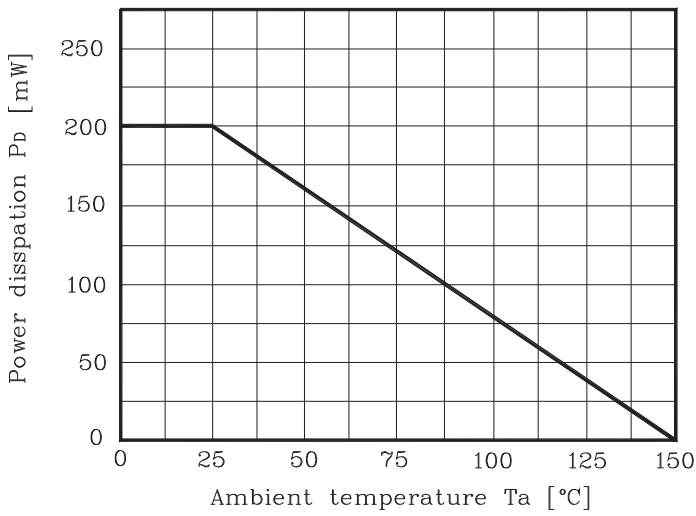


Fig. 2 I_O - $V_{I(ON)}$

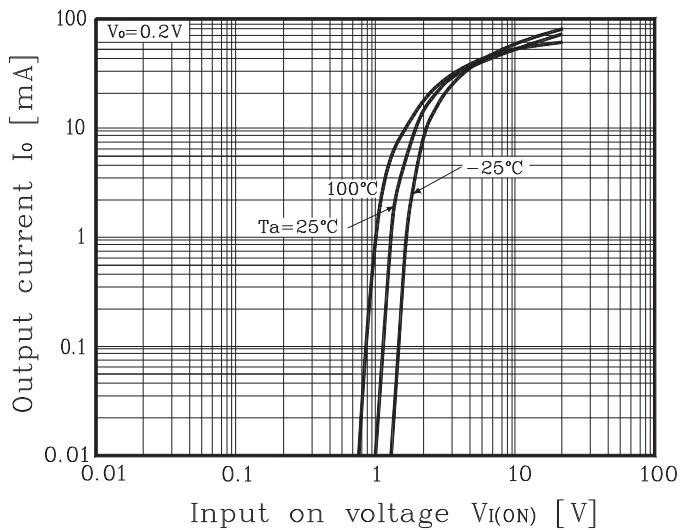


Fig. 3 I_O - $V_{I(OFF)}$

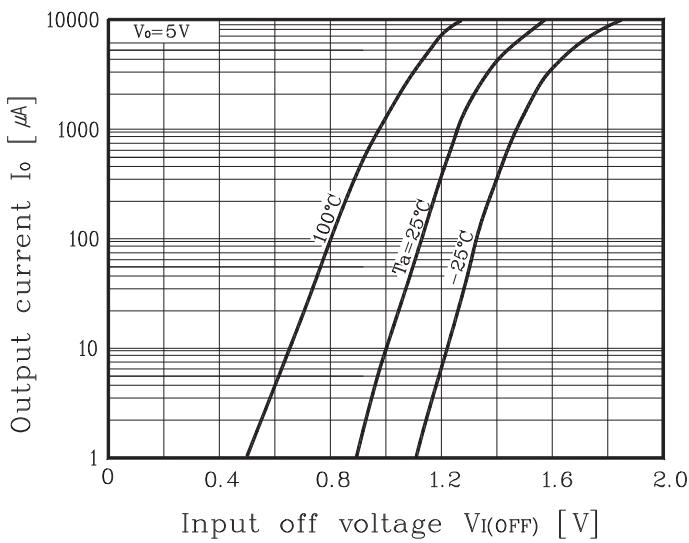


Fig. 4 G_I - I_O

